




刀锋系列洗墙灯是AD建筑立面洗墙灯系列中的专业型产品。
 采用挑选bin区的进口LED光源，确保色温一致。
 采用进口的光学透镜，被照物受光均匀。
 可携带可调角度的挡光板和防眩光装置。
 灯具安装支架带有方向调节刻度盘，力求所装灯具照射角度一致。
 灯具表面保护层采用阳极氧化处理工艺，外表美观且耐腐蚀。
 整灯结构性防水，防护等级达IP65。

LR-1, with adjustable Anti-glare accessory and direction adjusting dial for the mounting bracket.
 So that it could install lamp irradiation angle.
 Anodized extrusion processed housing finish, nice appearance and corrosion resistance.
 Waterproof housing structure, protection class of IP65.



配备AD15°窄角度光源，投射距离长，同时具有良好的均匀度。
 满足高要求的洗墙照明。
 Use 15° narrow beam lamp, with long illumination distance and good evenness. Suitable for high demand wall washing light.

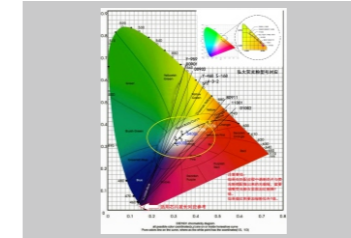


高标准的色温控制，色容差不超过3SDCM
 High standard cct control, color tolerance less than 3 sdcms



简易拆装防水接头 IP68
 Simple installation & disassembly water-proof connector. Ip68
 接头配备防尘端盖
 Connector with dust-proof end cap.




可调节挡光板0-90°
 根据现场照明环境控制眩光
 Adjustable anti-glare shutter according to the scene lighting environment to control the glare

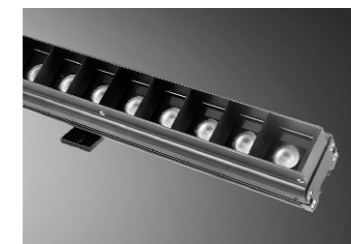


防眩光格栅
 收窄截光角有效防止眩光
 Anti-glare grid



安装支架具有刻度标示
 精准定位投射角度
 Mounting Bracket With the scale mark and projection angle.



防护等级 IP Rating IP 65
 输入电压 Input Voltage DC24V
 灯体材质 Housing material 铝型材 (Aluminum)
 灯体颜色 Finish color 哑黑 (Matte black)
 面板材料 Cover 钢化玻璃 (Tempered Glass)
 显色性 Color rendering Ra>80
 光源品牌 Lamp Brand OSRAM/NICHIA (2000K)
 环境温度 Operating Temperature -10°C~+45°C
 控制方式 Control Mode DMX512

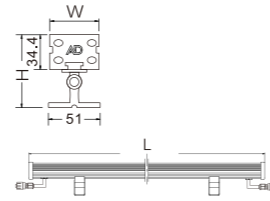

| 单色不带控制 Single color | | | L | W | H |
|---------------------|-----------|-------------------------------|------|----|----|
| 302410.024.0 | 24W(30ps) | 2000K/2700K/3000K/4000K/5700K | 1000 | 50 | 69 |
| 302410.030.0 | 30W(30ps) | 2000K/2700K/3000K/4000K/5700K | 1000 | 50 | 69 |
| 302410.036.0 | 36W(30ps) | 2000K/2700K/3000K/4000K/5700K | 1000 | 50 | 69 |

*单色带控制及RGB变色系列将在不久后推出



配件 Accessories



可调角度挡光板
Adjustable anti-glare shutter
92.3
57.6



防眩光格栅
Anti-glare grid
54
34.2
54.4



弹弓安装件



可调节安装件

